



**ROGUE
PUMP®**

MAX RGT®-75FI Specifications

Pump Specifications

English/Metric

Flow-rate	75 gpm/283 lpm (approx*)
Liquid/Medium	Liquid/Gas
Suction Pressure	Flooded
Gas Dissolution (air)	60 cfh, 10% maximum
Discharge Pressure	184ft/56m (80psi)
Shaft Seal Type	Mechanical Seal
Pump Mounting	Flex coupled
Impeller(s)	Single Stage
Fitting Dimensions	
Inlet	2"/DN 50, flanged
Outlet	2"/DN 50, flanged
Gas Inlet	1/4" NPT/DN 6
Weight	
Pump	245 lbs/111.1 kg
Pump & Motor	450 lbs/204.1 kg

Materials of Construction

Body	Ductile iron
Shaft Sleeve	304 stainless steel
Impeller	Carbon steel
O-ring(s)	Viton
Seal	Ceramic/C, 304SS, Viton
Guard	304 stainless steel, safety yellow
Coupling	Urethane high speed rings
Base Mount	Carbon steel
Finish	Metallic blue top-coat Rust inhibited pre-coat

Motor

Horsepower	15 hp
Efficiency	Premium, 92.4%
Speed	1765 rpm
Material	Carbon steel, painted
Enclosure Type	TEFC
Service Factor	1.15
Frame	256T
FLA	46.2-36.2/18.1

Utilities Required

Phase/Hz/Voltage	3/60/208:230-460v
------------------	--------------------------

* Flow rate determined by fluid/gas, temperature and operating parameters.






ROGUE
PUMP®

MAX RGT®-75FI Specifications


ENGLISH UNITS

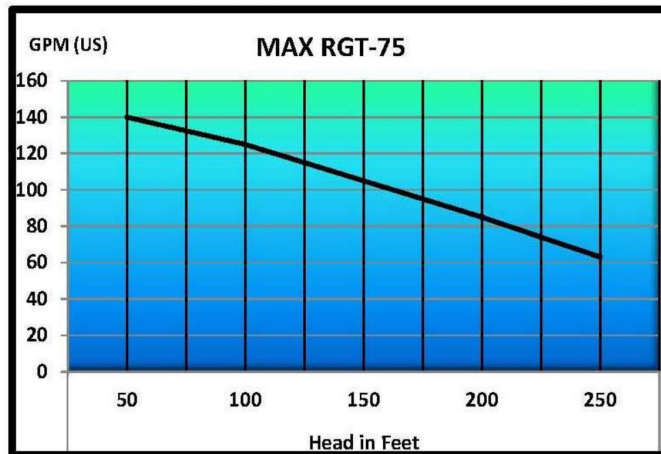

Fluid specific gravity 1.0 @ 70°F

15hp 230v-460v 3p 60Hz 1750rpm

METRIC UNITS

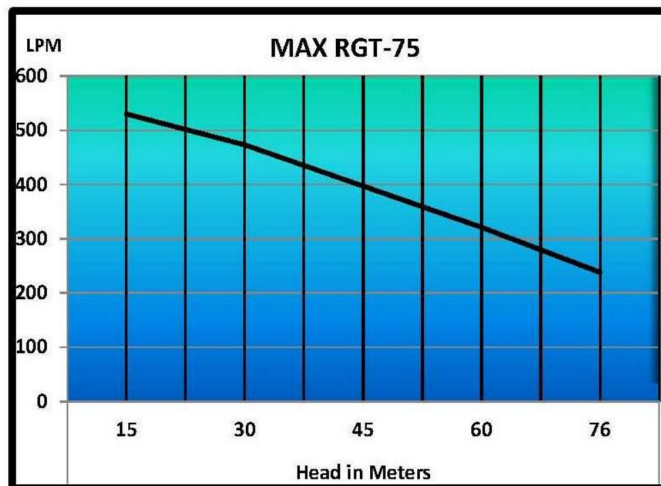

Fluid specific gravity 1.0 @ 21°C

15hp 230v-460v 3p 60Hz 1750rpm

* Flow rate determined by fluid/gas, temperature and operating parameters.

