



ROGUE

PUMP COMPANY[®]

A LIMITED LIABILITY COMPANY

MAX RGT-185FS SPECIFICATIONS

Pump Specifications

Flow-rate	English/Metric 185 gpm/700 lpm (approx*)
Liquid/Medium	Liquid/gas
Suction Pressure	Flooded
Gas Dissolution (air)	148 cfh, 10% maximum
Discharge Pressure	184ft/56m (80psi)
Shaft Seal Type	Mechanical seal
Pump Mounting	Flex coupled
Impeller(s)	Single stage
Fitting Dimensions	
Inlet	4"/DN 100, flanged
Outlet	3"/DN 80, flanged
Gas Inlet	3/8" NPT/DN 10
Weight	
Pump	631 lbs/286.2 kg
Pump & Motor	1068 lbs/484.4 kg

Materials of Construction

Body	304 stainless steel
Shaft Sleeve	304 stainless steel
Impeller	316 stainless steel
O-ring(s)	Viton
Seal	Ceramic/C, 304 SS, Viton
Guard	304 stainless steel, safety yellow
Coupling	Urethane high speed rings
Base Mount	Carbon steel
Finish	Metallic blue top-coat Rust inhibited pre-coat

Motor

Horsepower	40 hp
Efficiency	Premium, 93.6%
Speed	1750 rpm
Material	Carbon steel, painted
Enclosure Type	TEFC
Service Factor	1.15
Frame	324T
FLA	51-48/24

Utilities Required

Phase/Hz/Voltage	3/60/208:230-460v
------------------	--------------------------

* Flow rate determined by fluid/gas, temperature and operating parameters.






ROGUE

PUMP COMPANY_®
A LIMITED LIABILITY COMPANY

MAX RGT-185 PUMP CURVE


ENGLISH UNITS

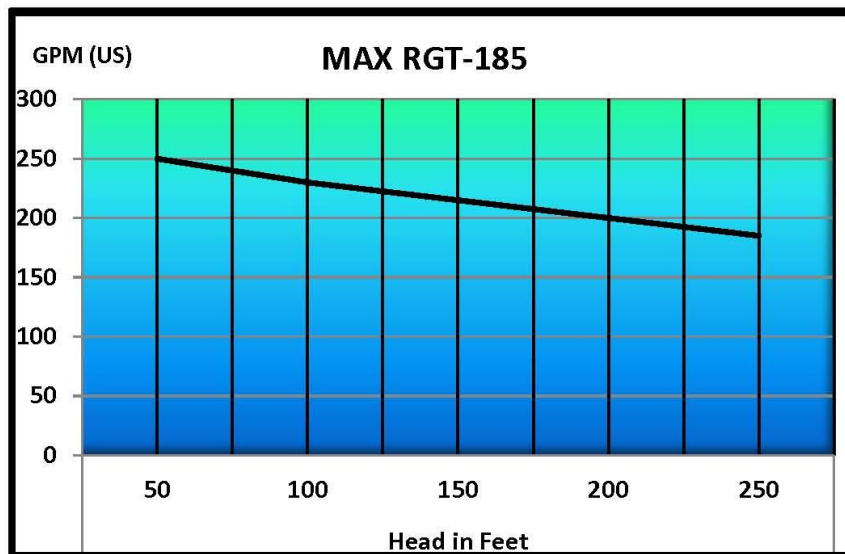

Fluid specific gravity 1.0 @ 70°F

30hp 230v-460v 3p 60Hz 1750rpm

METRIC UNITS

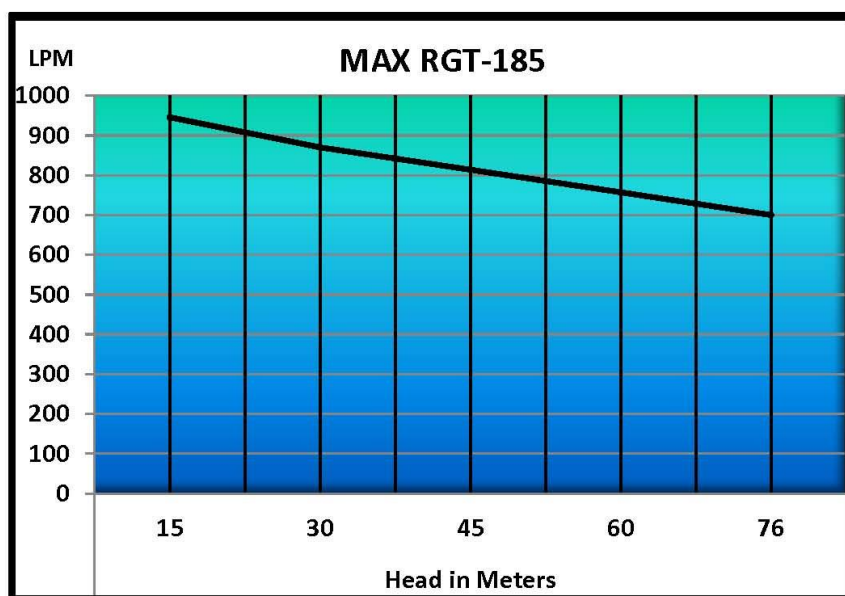

Fluid specific gravity 1.0 @ 21°C

30hp 230v-460v 3p 60Hz 1750rpm

